Part list for one assembly marked: AC0002 Q.ty tot. 1

TCM Finish.1 Code: Fireproofed: NO Fireproof Type:

Part.N.	Q.ty	Profile	Material	Lenght [mm]	Weight [kg] Unit	Weight [kg] Total	Area [m²] Unit	Area [m²] Total
A0008	5	UPN100	S355J2	805	8.53	42.65	0.30	1.50
A0100	3	UPN120	S355J2	1005	13.41	40.24	0.44	1.31
A0118	5	UPN100	S355J2	1105	11.71	58.55	0.41	2.06
A0200	1	PL12*230	S355J2+Z15	220	4.77	4.77	0.11	0.11
AC0002	1	HEA200	S355J2	5398	228.10	228.10	6.13	6.13
				Assembly total		374.31		11.11

FINISHING SPECIFICATION

	Substrate	Surface Preparation and Blast Profile	Coat	Generic System Details	DFT (µm)
PAINTING CYCLE	CS	ISO 8501-1 grade Sa 2.5 or SSPC-SP 10 1.2	A	Epoxy / ESI,	80-100
			B	Polyurethane	100-80
				System NDFT (µm)	180
FINISH COAT COLOR					

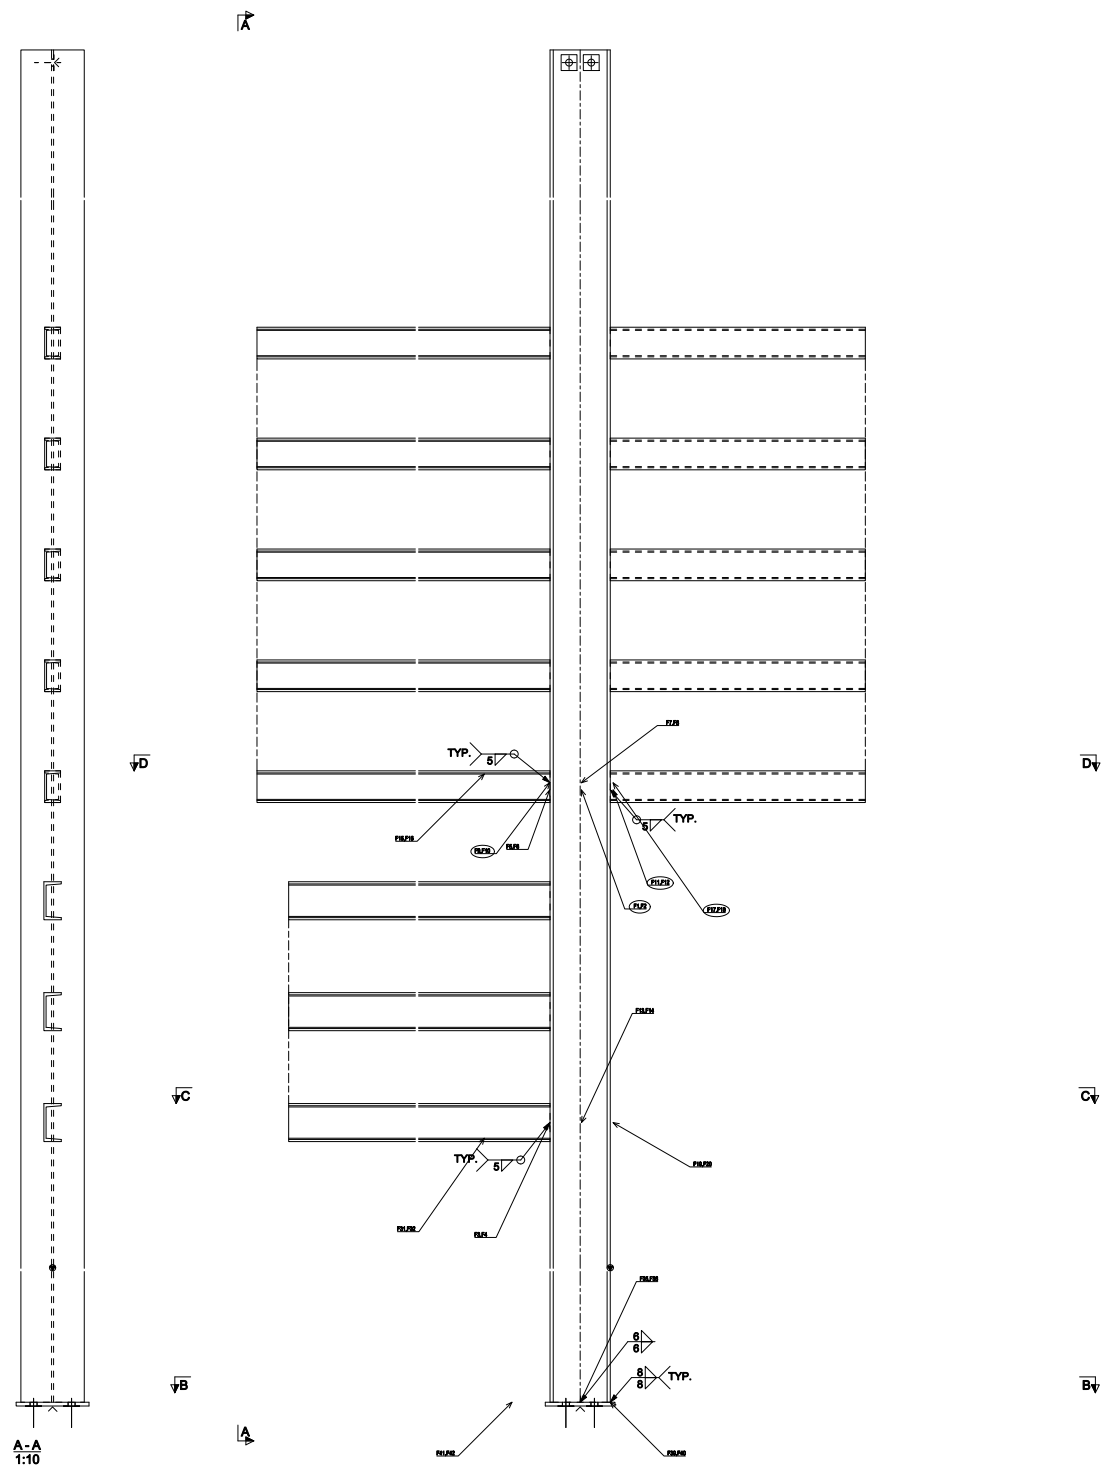

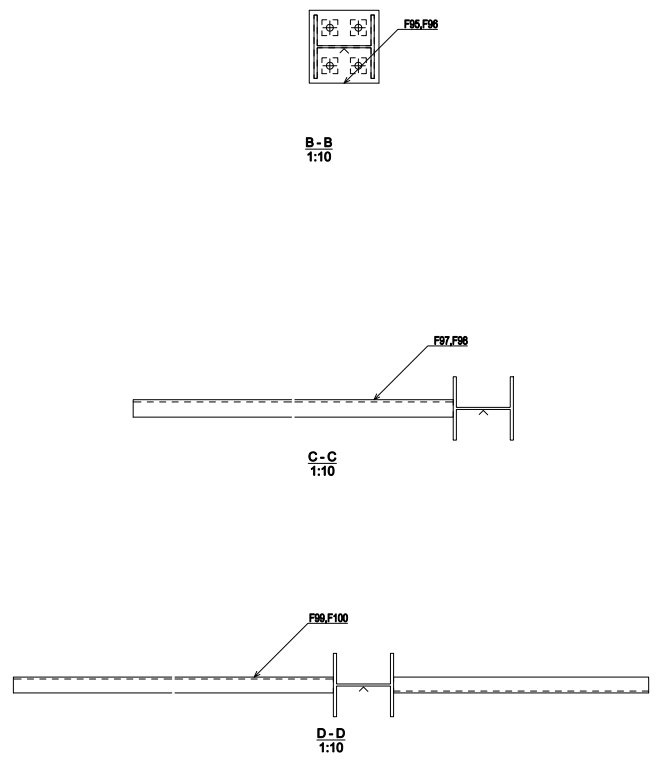

GENERAL NOTES

1. Steel structure fabrication shall comply with the requirements of last issue of 4503-AI-DX-T0000001
2. Unless otherwise specified, fillet welds shall be as per following scheme:

with $t_2 < t_1$

$z = t_2$

ASSEMBLY TITLE LEGEND

CWA	STR. TYPE	FINISH.	ASS. POS.
VAR. DIGITS	1 DIGIT	1 DIGIT	6 DIGITS
8901	0	1	AC0002

3. Where required, masking area shall be provided on contact surface sides. Unless otherwise specified, masking size and pattern according to below mask details for painting:



4. ▼ denotes assembly orientation mark
5. All dimensions and coordinates are in millimeters, elevations in meters
6. Only written dimension shall be followed, drawing shall not be scaled off
7. Seal welds to be provided as per document 4503-XI-SW-T0000001

REV.	DATE	REASON FOR ISSUE	PREPARED	CHECKED	APPROVED
00	04.02.2026	ISSUED FOR CONSTRUCTION	Z.Neng	X.Qiang	Z.YingDong

SILLENO
JV TCM-SPIDI
TECNIMONT KZ
SINOPEC

MANUFACTURER

VENDOR DRAWING No.
AC0002

DOC. CLASS: 03

PROJECT TITLE
SILLENO EPC
PE UNITS, LAO AND UI&O

DRAWING TITLE
INTERCONNECTING PIPE RACK (IPR) SECTION 1
SHOP DRAWING OF COLUMN
8901IR004I01AC0002

SHEET SIZE	PURCHASE ORDER NUMBER	REVISION
A1	7500137917	00
SCALE:	MATERIAL REQUISITION NUMBER	SHEET
1:10	001T01	1 of 1